






TECHNICAL DATA

ESTRAD SAFETY R11/45+






PRODUCT

Estrad Safety R11/45+		Safety floor
Application	EN 685 / ISO 10874	23/34/43
		

SPECIFICATION


Thickness	 EN 428 / EN ISO 24346	2.0 mm (~0.08")
Weight	 EN 430 / EN ISO 23997	2600 g/m ² (0.53 lbs/sq ft)
Roll length	 EN 426 / EN ISO 24341	20 m (65.62')
Width	 EN 426 / EN ISO 24341	2 m (6'6")

PRODUCT PROPERTIES

PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore
General performance	EN 13845 ASTM F1303	Conforms Conforms
Fire resistance	 EN 13501-1 ASTM E648 Aus NCC Spec C1.10-3	B _{fl} -s1 Class 1 Complies
Slip resistance	 EN 13845 AS 4586 Appendix A AS 4586 Appendix D DIN 51130 RRL Pendulum Test Surface Roughness	ESf P4 R11 R11 ≥ 45 (wet test - 4S Rubber/Slider 96) Rz ≥ 20 μm
Electrical propensity	 EN 1815	≤ 2 kV (antistatic)
Wear and scratch resistance	 EN 13845 EN 649	50,000 cycles Group T
Resistance to chemicals	 EN 423	Good chemical resistance



COLLECTIONS COLOURS
ESTRAD SAFETY R11/45+

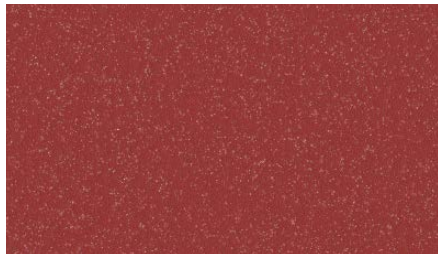

7754




7755




7766



7756

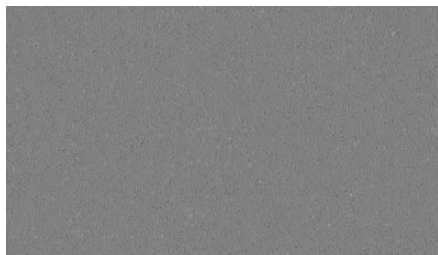

7757

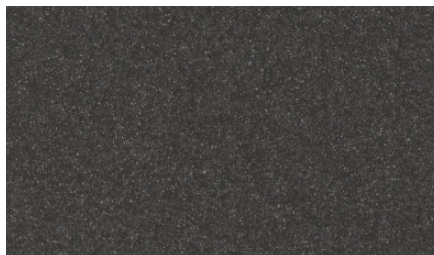

7758



7759



7760




7761



7762



7763

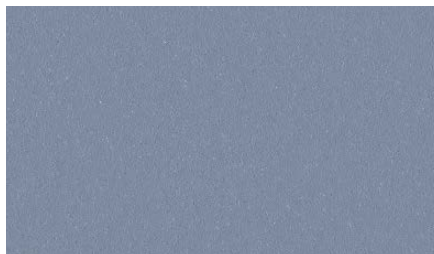

7764



7765